

www.quadrifoglio.com

design office



TOPS

30 mm melamine faced chipboard (MFC) finished with 2 mm matching straight ABS impact resistant edges, easy to clean scratch-resistant anti-reflective melamine. MFC density 670/730 kgs per cubic meter.

Finish options:	BA	GR	CL	OL	ОВ	RK	FA	NO
	White	Grey	Concrete	Elm	Whitened Elm	Oak	Beech	Canaletto walnut

METAL FRAMES

Cable managed legs made of epoxy powder painted 1.5 mm steel, 80×80mm square columns - Ø43 mm upper and lower round portholes on the inner side of both legs - the Mfc top is supported on 310×310mm mounting plates made of epoxy powder coated 3mm steel fitted on top of the columns - 580×580mm square footplates made of epoxy powder coated 8mm steel covered with protective 0.8 mm stainless steel - four anti-slide spacers.



Finish options:



Beams are always supplied in a silver finish.



Cable managed column made from powder coated 1.5mm 80×80mm steel tube.




 $580{\times}580\text{mm}$ base made from powder coated 8mm steel covered with protective 0.8mm stainless steel.




Quadrifoglio Group

GREKO TABLE

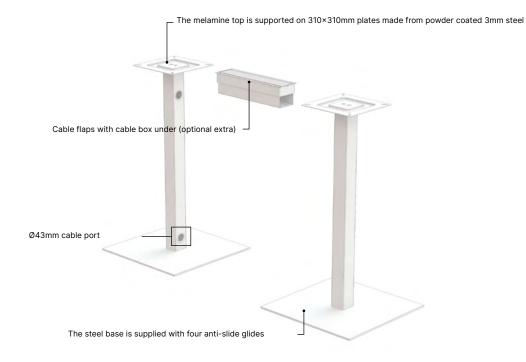

SIZES





MATERIALS AND RECYCLABILITY

MFC panels used for Greko range tables are solely manufactured with 100% recycled wood and fully meet requisites of formaldeyde low emissions (CARB Quality Award CATAS Certificate). Rasins used for panels and melamines are free of SVHC substances (to be found in the ECHA list updated as of 12/01/2017).



STANDARDS

Greko has passed the following tests as certified by the CATAS Laboratories in San Giovanni al Natisone - Udine, Italy.

- Non domestic tables: safety requirements EN 15372:2016 clause 5.1 5.2
- Non domestic tables: information for use EN 15372:2016, clause 6
- Horizontal static load test EN 1730:2012, clause 6.2
- Vertical static load test EN 1730:2012, clause 6.3
- Horizontal fatigue test EN 1730:2012, clause 6.4.2
- Vertical fatigue test EN 1730:2012, clause 6.5
- Vertical impact test EN 1730:2012, clause 6.6
- Drop test EN 1730:2012, clause 6.9
- 9. Stability under vertical load EN 1730:2012, clause 7.2



CERTIFICATES

Constantly receptive to market requirements, Quadrifoglio Sistemi d'Arredo pay special attention on quality and safety contents in order to provide high products and services. The Company has reached certifications UNI EN ISO 9001/2015, UNI EN ISO 14001/2015 and UNI EN ISO 45001/2018 to confirm his policy. Our products are certified and ensured by FSC[™] and ECOLOGICAL PANEL.

COMPANY WITH MANAGEMENT SYSTEM CERTIFIED BY DNV ISO 9001-ISO 14001 ISO 45001







GREEN ENERGY

The Company had installed the photovoltaic system with 4.500 solar panels in a 7.350 m² surface that covers almost entirely the factory. The photovoltaic is able to produce 1Mw of a quiet green energy, that does not harm the environment and is waste-free. With his high production capacity the photovoltaic allows us to reduce emissions in the atmosphere of all those polluting substances and to those that contribute to the greenhouse effects. Consequently, such measures make us save every year 180 tonne of petrol oil, 440 tonne of CO2, 514kg of sulphur dioxide, 448 kg of nitrogen oxide and 23kg of dust.



TRANSPORT

Detachable systems. Volumes that facilitate the optimization of space. Maximum reduction of energy consumption by transport.